

REB33

电梯用盘式双倍低噪音电磁安全制动器

REB33 Double Disc Electromagnetic & Noise-Reduced Brakes for Elevators

产品特点

- 安全性: 符合GB7588-2003和EN81相关规定
- 噪音低: 独特的安全减噪结构, 噪音低于55dB (A)
- 手动释放力矩低: 大扭矩下可以通过释放手柄轻松的释放制动器, 也可以通过远程松闸来实现释放
- 微动开关和安装尺寸可根据客户要求进行选择

Product Features


- Safety: comply with GB7588-2003 and EN81 standards
- Low Noise: less than 55db (A) with an unique noise- reduction mechanism
- Low manual-releasing torque: The brake can be released easily by release handle in case of large torque; it also can be released by remote system
- Optional installation bore diameter and microswitch

应用范围

- 中高层直梯曳引机

Application

- Middle or high floor straight elevator traction machine

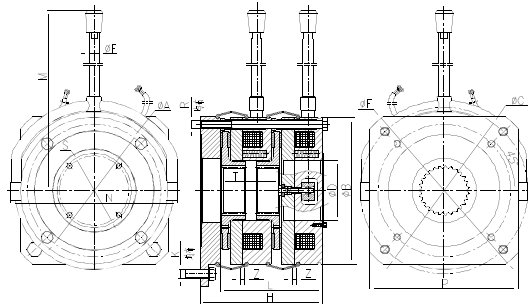

技术参数

Technical Data

规格 Specification	REB3314	REB3316	REB3318	REB3320	REB3325	REB3328
最大扭矩 Max. Torque (N·m)	2×60			2×800	2×1200	2×1600
最小扭矩 Min. Torque (N·m)		2×220	2×290	2×500	2×1000	2×1200
A (mm)	145	175	190	235	277	287
B (mm)	165	190	210	260	302	312
C (mm)	200	175	190	292	360	358
D (mm)	60	77	87	104	135	140
E (mm)	12	15	15			
F (mm)	220	190	210	324	410	394
H (mm)	160	160	170	219	236	230
L (mm)	135	146	156	193	201	203
M (mm)	250	360	360			
N (mm)	195	240	250			
P (mm)	170	190	210	264	360	315
S (mm)	80	客户指定 Customer Requires	100	120	150	150
T (mm)	70	85	90	107	110	110
Z (mm)	0.25~0.3	0.25~0.35	0.25~0.35	0.25~0.35	0.3~0.35	0.3~0.35
K	4×M10	6×M10	6×M10	4×M16	4×M20	4×M20
R	4×M8	4×M10	4×M10	6×M12	6×M12	6×M12